


HESCO[™] INC.

INDUSTRIES, INCORPORATED

GAS / SAFETY ALARM SYSTEM

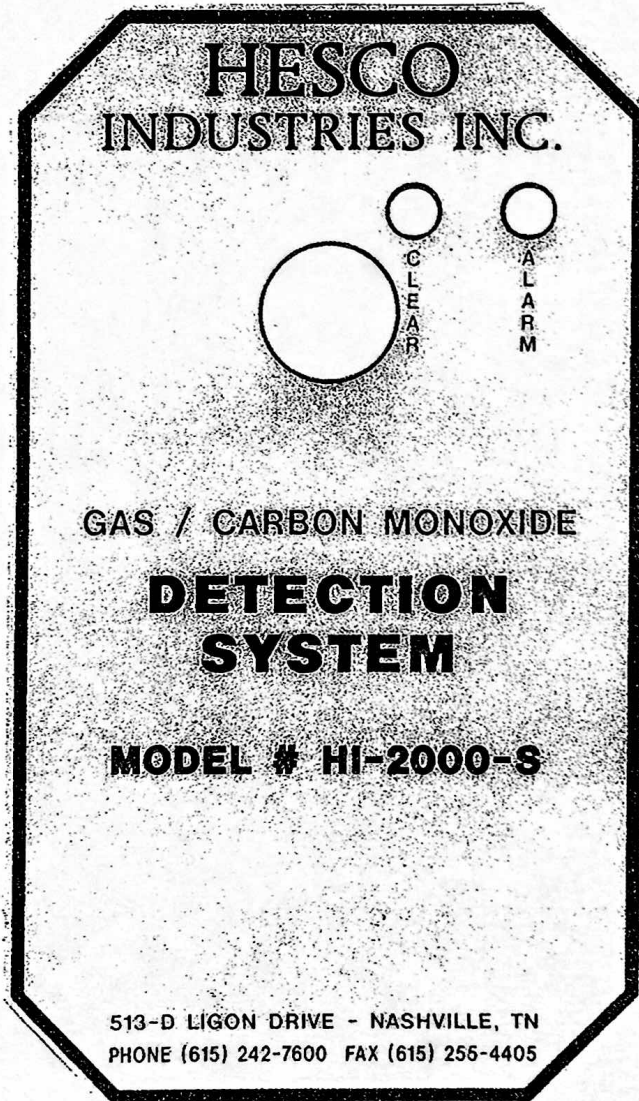

HI-2000

- Moulded Housing
- Temperature Compensated Circuit 32° F—120° F
- Vibration Resistant
- Power Indicator Light
- Audible Alarm 95 DB at 10 Feet
- Pre-Wired with 3 Prong Pigtail
- 110/1/60 Power Required
- Solid State Electrical Circuit
- Tin Oxide Semiconductor
- Self Monitoring

HI-2000-S

- Moulded Housing
- Temperature Compensated Circuit 32° F—120° F
- Vibration Resistant
- Power Indicator Light
- Audible Alarm 95 DB at 10 Feet
- Pre-Wired with 3 Prong Pigtail
- 110/1/60 Power Required
- Solid State Electrical Circuit
- Tin Oxide Semiconductor
- Self Monitoring
- Terminal Strip 9V, 12V, and 24V Connections

HI-2000-S

OPTIONAL

- REMOTE SENSORS
- REMOTE ALARM BELL

Carbon Monoxide	300 PPM
Propane (LP)	Less than 5,250 PPM
Natural Gas/Methane	Less than 12,500 PPM

513-D LIGON DRIVE • NASHVILLE, TN 37204 • (615) 242-7600 • FAX (615) 255-4405